


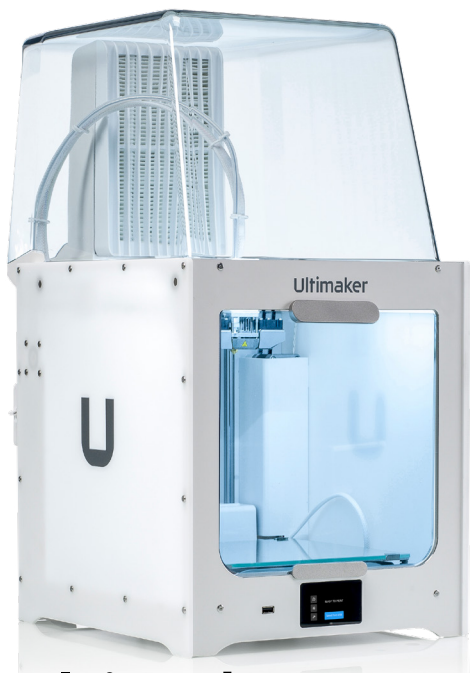

Ultimaker 2+ Connect Air Manager

Product data sheet

Upgrade your peace of mind

The Ultimaker 2+ Connect Air Manager¹ gives you more confidence and setup flexibility. Designed to increase user safety, it removes up to 95% of ultrafine particles (UFPs) while top and front enclosures shield users from hot and moving components.

Key features

- ✓ **EPA filter:** Removes up to 95% of UFPs
- ✓ **Enhanced safety:** Encloses the top and front of the printer
- ✓ **Easy setup:** Printer detects when the Air Manager is connected

Ultimaker 2+ Connect Air Manager specifications

Properties	Filter technology	EPA filter
	Fan technology	Air extraction by low-noise brushless fan
	Filter efficiency	Up to 95%
	Filter replacement	Recommended every 1,500 print hours (approx. 1 year)
	Operating sound	< 51 dBA (including printer)
	Connection (data and power)	UMB connection (included)
	Compatible materials	Optimized for Ultimaker PLA, Tough PLA, ABS, Nylon, CPE, CPE+, PC, PP, TPU 95A (Also supports third-party materials)
Physical dimensions	Dimensions (XYZ)	328 x 459 x 257 mm (12.9 x 18.1 x 10.1 in)
	Dimensions (including printer)	342 x 460 x 636 mm (13.5 x 18.1 x 25 in)
	Shipping box dimensions	491 x 401 x 380 mm (19.3 x 15.7 x 15 in)
	Net weight	2.65 kg (5.8 lbs)
Warranty	Warranty period	12 months

¹ Requires Ultimaker 2+ Connect 3D printer. For illustrative purposes, the Air Manager is shown with the printer

Available from **ADDITIVE** 

additive-x.com

sales@additive-x.com

01765 694 007



Ultimaker