

3D print your models in superb quality on the **Builder Extreme 1500 PRO**.

additive-x.com team@additive-x.com 01765 694 007





The Builder Extreme 1500 PRO is seen as a workhorse, printing high-quality parts time after time. The uniquely long build area makes it the perfect industrial 3D printer for full-scale prototypes, architectural projects or product designs.

Extremely long build volume

volume build The of the Extreme 1500 PRO is 1100x500x820 (XYZ) mm which makes it one of the longest and biggest industrial FDM 3D printers available on the market.

Despite the long X axis, the machine is a perfect fit for each and every office space.





Fully-closed housing

The fully closed housing of Builder Extreme 1500 PRO, in combination with the heated bed, positively influences the print quality of the finest details of your objects. It also improves adhesion of the 3D printed part which is a key for extremely large prints.

Transparent door allows you to monitor the printing process and reduces the sound of the machine by 40%.

Builder Extreme 1500 PRO is ready to integrate a BOFA fume extraction unit, which reduces the occupational risks associated with melting plastics.






Versatile Dual-Feed extruder

The Dual-Feed extruder has been developed in-house and has only one nozzle.

The machine enables to print dualmaterial objects, as well as extremely large parts made of one material.

The extruder comes with a set of easy to swap nozzles of three different diameters.



0.8 mm nozzle

1.2 mm nozzle



0.1 - 0.3 mm layer height

0.4 - 0.7 mm layer height

0.8 - 0.9 mm layer height

Printing extremely large parts? Use two big spools of filament. When you continuously print 9 kg of material, the print quality improves and the filament needs to be refilled rarely.



Effortless operation – 7-inch touch screen

The responsive, full-colour touch screen makes operating the Builder Extreme 1500 PRO straightforward.

The interface allows you to have adjustment control over the 3D printed part and your machine. From print speed and temperature to the filament change – most of the operations can be altered on the screen.

The printer comes with useful instruction videos about the machine operation and maintenance activities.

You can lock the screen with a personal code for security reasons.






Features that make large scale 3D printing trouble-free

The Builder Extreme 1500 PRO is equipped with the UPS system that resumes the operation after a power cut. When a power failure occurred, the current status is saved and as soon as the power comes back, you can resume the print.


The filament detection ignites when the machine is running out of filament. After refilling the new spool, you can finish the print job.

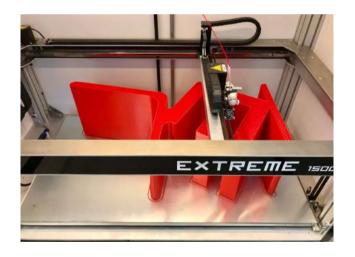

Mobility

The machine takes relatively little space, so it can be placed both in a corner of your office and in the industrial warehouse of the factory.

Furthermore, it is equipped with the four wheels which makes it mobile and easy to transport between different departments.

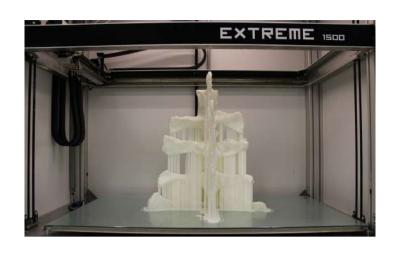

Slicing software

Slicing software is just as important as the 3D printer itself. That is why the Builder Extreme 1500 PRO comes with Simplify3D, which is the ideal program for large scale 3D prints.

To make a start hassle-free, we already optimised the settings for the different nozzle diameters so you can start printing as soon as the 3D printer arrives.



Key facts

Operating volume

Print speed

Layer height resolution

Unique features

1100 x 500 x 820 mm (XYZ)

Up to 300 mm/s

0.1 – 0.9 mm

Filament detection system Uninterruptible power supply

Interchangeable easy-to-swap nozzles

Transportation wheels

BOFA extraction unit (optional)

General specifications

Outer dimensions
Shipping dimensions

151 x 79 x 155 cm 165 x 85 x 190 cm

Weight 250 kg

Power rating 1800 W (peak)

UPS system Resume after power outage

Printing process

Technology Print head Fused deposition modelling (FDM/FFF)

Mono- or Dual-Feed extruder

Print speed Up to 300 mm/s
Travel speed Up to 500 mm/s
Build plate Aluminium build plate

Heated bed Up to 60°C

Bed levelling Automatic levelling

Feeder type Direct drive
Nozzle diameter 0.4, 0.8, 1.2 mm

Control

Connectivity

Display

On-board camera Supplied software Wi-Fi, USB port, Ethernet

7-inch full colour touch screen

Snap shots from desktop or mobile devices

Simplify3D®

Filaments

Filament diameter Filament detection

Filament detecti Materials 1.75 mm

Yes

PLA, PET, PVA, PRO1 (ABS replacement), flexible filament

All specifications might be subjected to changes.



additive-x.com team@additive-x.com 01765 694 007