

Markforged Onyx ESD

Supplemental Datasheet

Overview

Onyx ESD is an ESD-safe micro carbon fiber filled nylon composite base material with similar mechanical properties and surface finish to Markforged Onyx. It is static-dissipative and reinforceable with continuous fibers to achieve up to 10x strength compared to existing ESD-safe plastics.

This datasheet covers surface resistance data and test methods. Please refer to the Markforged Composites Datasheet for more detailed mechanical data.

Specifications

Material Property	Value	Test Standard
Surface Resistance	10 ⁵ - 10 ⁷ Ohms (optimal ESD-safe settings ¹) 10 ⁵ - 10 ⁹ Ohms (default Eiger settings)	ANSI/ESD STM11.11
Tensile Stress at Yield	52 MPa	ASTM D638
Tensile Modulus	4.2 GPa	ASTM D638
Available layer heights	0.100mm 0.125mm	
Available Continuous Fiber Reinforcements	Carbon Fiber, Kevlar, HSHT Fiberglass, Fiberglass	
Compatible Printers	Markforged Industrial Series (X7, X5, X3)	

Surface Resistance Testing / Definitions

We developed this material to be static-dissipative, as tested under ANSI/ESD STM11.11. This results in an ESD-safe rating under most other testing standards, including ASTM D257, MIL-STD-1686C, MIL-HDBK-263B. Samples were prepared using recommended settings to optimize for uniformity of surface resistance. Results may vary based on print settings, test environment, and geometry.

Classification of Materials by Surface Resistance (Ω)

Conductive | <10⁴ ohms

Electrons flow easily across surface

Can allow static charge to pass through, potentially damaging sensitive electronics

Achievable by a wide range of materials including metals, machinable polymers with conductive additives, and 3D printer filaments with conductive additives

Static Dissipative | 10⁴ - 10¹¹ ohms

Controlled flow of electrons across surface

Restricts or eliminates charge passthrough

Requires fine process control to achieve target range, most commonly found in large batch polymer production i.e. injection molding, extrusion, rolling

Insulative | >10¹¹ ohms

Limits flow of electrons across surface

Charge can persist for later discharge, potentially damaging sensitive electronics

Includes most polymers and 3D-printer filaments



Test Description


Surface resistance testing of printed Onyx ESD platens (76mm x 127mm x 5mm) was performed according to ANSI/ESD STM11.11. Three distinct print orientations were tested, representing six distinct surface types commonly encountered in 3D printing. To ensure repeatable and statistically significant results, six samples for each orientation were tested internally and verified by a third party lab. The graph to the right plots the geometric mean and standard error of measured surface resistance values.

Conditioning of specimens before measurement is necessary, where specimens must be placed in a conditioning chamber at 12% +/-3% RH and 23°C +/- 2°C

Instrumentation required:

- 1. Resistance meter
- 2. 5lb concentric ring surface resistance probe
- 3. Test plates


Detailed Results

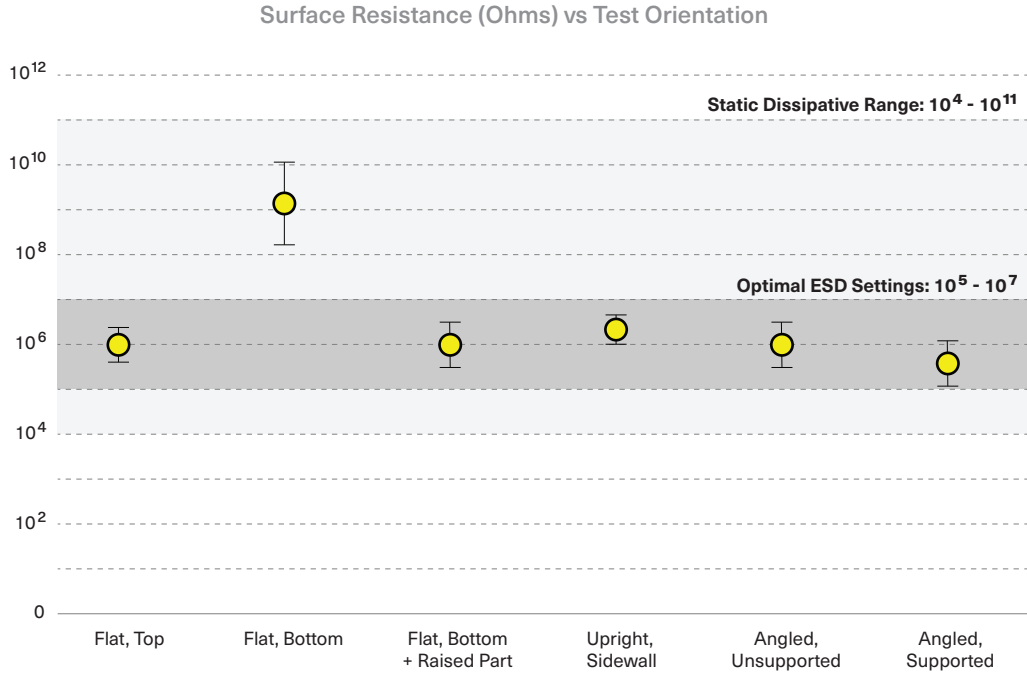

Notes on Print Orientation


Below are visual representations of the different print orientations used to complete surface resistance testing.

Flat

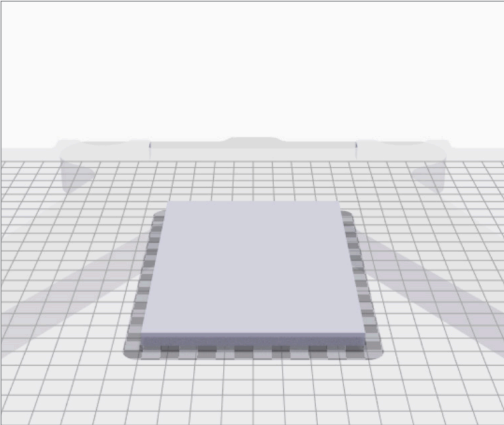


The Raised Part feature prints the part above a thin layer of supports. Turn on for the most consistent surface resistance.

Upright

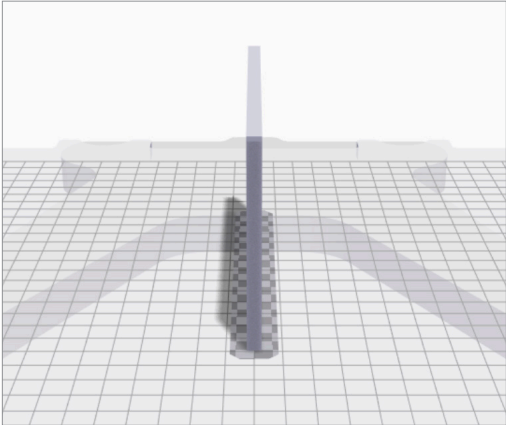

Sidewall values were measured individually, and averaged for simplicity.

Angled (45°)

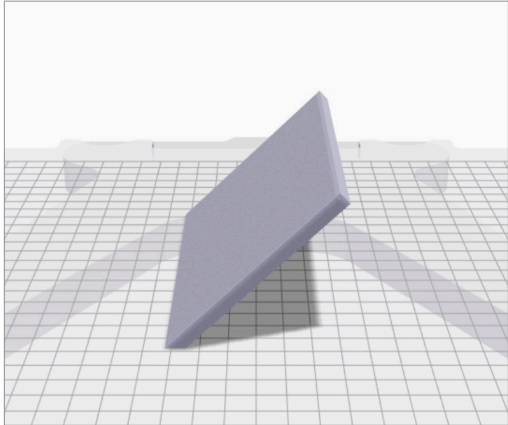

The unsupported side faces up, while the supported side faces down.

Optimal ESD Print Settings

Below are print settings that should be used to optimize surface resistance and result in every surface of your part meeting the narrowest range of 10^5 - 10^7 ohms.

PART SETTINGS

Review and modify your settings for printing.

General

Settings

Infill

Material

Onyx ESD

Reinforcement Material

None

Printer Type

Industrial Series (X3, X5, X7)

Orientation

Manual Rotation

X

90

Y

0

Z

0

Lock Orientation

No

Cloud Slicing

Yes

PART SETTINGS

Review and modify your settings for printing.

General

Settings

Infill

Layer Height (mm)

0.100

Original Units

Metric

Scale

1

Use Supports

Yes

Supports Angle

45

Raise Part

Yes

Expand Thin Features

No

Use Brim

Yes

Turbo Infill (Beta)

No

Turbo Supports (Beta)

No

PART SETTINGS

Review and modify your settings for printing.

General

Settings

Infill

Fill Pattern

Triangular Fill

Fill Density

2837%55

Roof & Floor Layers

0.40mm

1

2

3

4

5

6

7

8

9

10

Wall Layers

0.80mm

1

2

3

4

This representative data were tested, measured, or calculated using standard methods and are subject to change without notice. Markforged makes no warranties of any kind, express or implied, including, but not limited to, the warranties of merchantability, fitness for a particular use, or warranty against patent infringement; and assumes no liability in connection with the use of this information. The data listed here should not be used to establish design, quality control, or specification limits, and are not intended to substitute for your own testing to determine suitability for your particular application. Nothing in this sheet is to be construed as a license to operate under or a recommendation to infringe upon any intellectual property right.