



ADDITIVE 

additive-x.com
sales@additive-x.com
01765 694 007

Ultimaker PVA Removal Station

Product data sheet

Simple post-processing. Faster parts

Experience quicker and easier post-processing when using PVA support material for complex parts or stunning visual prototypes, with the Ultimaker PVA Removal Station. Part of our start-to-finish 3D printing platform, it ensures quicker design iterations with minimal operator time and no mess.

Remove PVA up to 4x faster

The Ultimaker PVA Removal Station features a high-speed dissolving process driven by a magnetic rotor. Compared with motionless water in an improvised container, it removes PVA up to four times faster – even from hard-to-reach cavities in complex designs. So you have parts ready as soon as possible.

- ✓ **Rotor-powered circulation:** A magnetic rotor circulates water to reach all parts of your 3D print
- ✓ **Adjustable rotor speed:** Adjust for faster dissolving or to protect fragile parts
- ✓ **Keeps prints secured:** A rinsing basket keeps prints in place and submerged
- ✓ **Easy to follow progress:** A transparent, illuminated container makes it easy to know exactly when your part is ready
- ✓ **Low maintenance:** Ergonomically designed for easy cleaning
- ✓ **No chemicals needed:** Just fill with regular tap water, which can be safely disposed of when finished
- ✓ **Clean and no-mess:** Ergonomic design features help keep your workspace clean and tidy

The Ultimaker platform



3D printers that simply work

Our award-winning 3D printers are robust, reliable, and easy to use. They deliver quality parts time and again. Designed and tested to run 24/7, they allow you to achieve the results you need more quickly and easily.



Software ready for Industry 4.0

Trusted by millions of users across 14 languages, Ultimaker Cura integrates with any workflow through Ultimaker Marketplace plugins. Then scale production and digital distribution with Ultimaker Digital Factory.



Material choice like never before

Ultimaker offers the widest material choice on the market. Through our Material Alliance, choose the perfect filament for your application – from advanced polymers to carbon fiber composites.




Support dedicated to your success

Wherever you are in the world, Ultimaker support is close by. Our global network of service partners offer professional installation, training, and maintenance in your language and time zone.

Learn more at ultimaker.com/pva-removal-station


Ultimaker

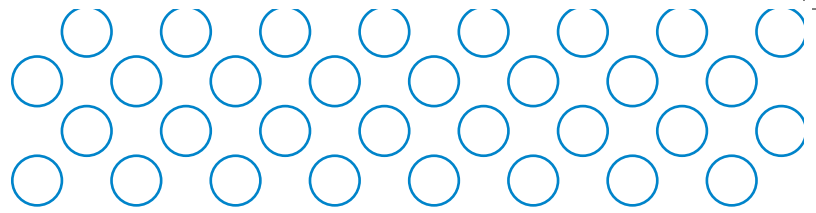

Ultimaker PVA Removal Station specifications

| | | |
|--------------------------------|---------------------------------|---|
| Properties | Container volume | 13.7 L (3.6 US Gal) |
| | Maximum part size (XYZ) | 200 x 230 x 165 mm (7.8 x 9 x 6.4 in) |
| | Supported materials | Optimized for: PLA and PVA Also suitable for PETG, Tough PLA, Nylon, CPE in combination with PVA (Also supports equivalent third-party materials) |
| | Supported solvents | Water |
| | Rotational speed | 225 RPM (normal) 100 RPM (low) |
| | Operating sound | < 50 dBA |
| Physical dimensions | Dimensions | 303 x 325 x 374 mm (11.9 x 12.8 x 14.7 in) |
| | Dimensions with handle extended | 303 x 325 x 528 mm (11.9 x 12.8 x 20.8 in) |
| | Net weight | 6.35 kg (14 lbs) |
| | Container weight (empty) | 4.2 kg (9.3 lbs) |
| | Shipping box dimensions | 400 x 400 x 500 mm (15.7 x 15.7 x 19.7 in) |
| Ambient conditions | Shipping weight | 8.5 kg (18.7 lbs) |
| | Operating ambient temperature | 15 – 32 °C (59 – 90 °F lbs) |
| | Non-operating temperature | 0 – 32 °C (32 – 90 °F lbs) |
| | Relative humidity | 10 – 90% RH non-condensing |
| Electrical requirements | Voltage | 100 – 240 V AC |
| | Frequency | 50 – 60 Hz |
| | Power | 38 W |
| Warranty | Warranty period | 12 months |

Dissolving time comparison

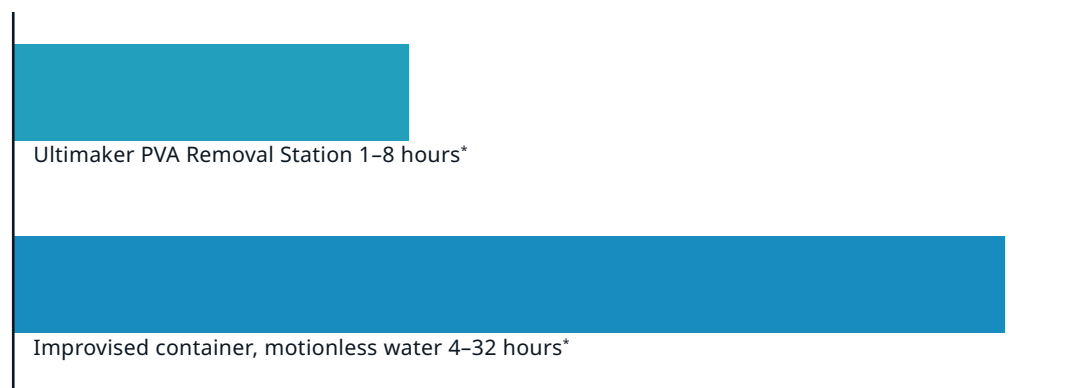

**Times may differ and increase this range depending on the size and density of the support structure*



additive-x.com
sales@additive-x.com
01765 694 007

Ultimaker